


# ARROW (OUT-SWING ONLY) TYPE STANDARD ACCESS DOOR W/LOUVERS AHFL-40



MODEL AHFL-40                      MODEL AHFL-40  
DOOR PANEL VIEW MINUS FRAME  
(LEFT HINGE UNITS SHOWN)

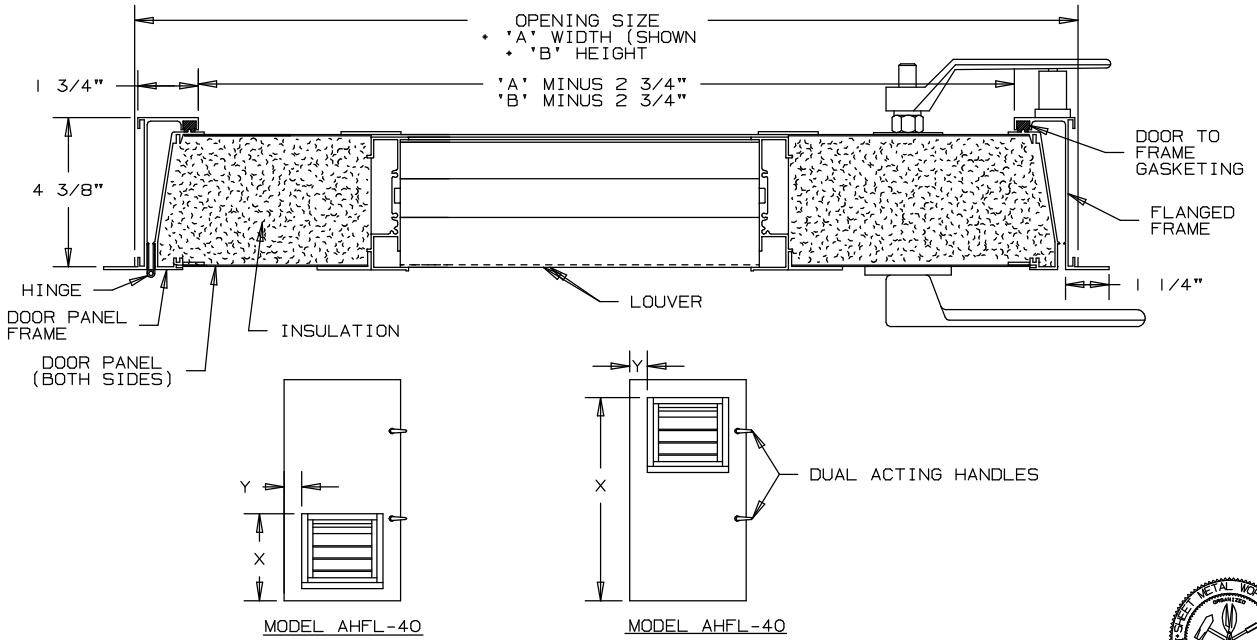

### SCHEDULE

ITEM	QTY	MODEL		OPENING SIZE		LOUVER SIZE (W x H) O.D. OF FLANGE	LOUVER LOCATION ("X" AND "Y") O.D. DIMENSIONS
		AHFL-40	L/H    R/H	*'A' WIDTH	*'B' HEIGHT		
		AHFL-40				EA-400-F LOUVER	
		AHFL-40					
		AHFL-40					

### NOTES

1. HINGE ALWAYS FURNISHED ON 'B' HEIGHT DIMENSION.
2. (L) DESIGNATES DOORS WITH LOUVERS. SPECIFY (L/H) LEFT HAND OR (R/H) RIGHT HAND HINGE WHEN VIEWING FROM THE OUTSIDE.
3. MINIMUM LOUVER SIZE IS 12"x12". MAXIMUM LOUVER SIZE IS FULL DOOR PANEL SIZE. LOUVER LOCATION USE X-Y DIMENSIONS.
- \*4. UNLESS OTHERWISE SPECIFIED, DOOR WILL BE FABRICATED 1/4" UNDER LISTED SIZE. DIMENSIONAL TOLERANCE IS ±.075.
5. MINIMUM SIZE 12" WIDE x 12" HIGH  
MAXIMUM SIZE 48" WIDE x 96" HIGH  
(WIDTH CANNOT EXCEED 2x HEIGHT)
6. OPTIONAL MATERIALS AVAILABLE FOR THE FOLLOWING COMPONENTS:  
DOOR PANELS-BONDERIZED STEEL, ALUMINUM OR STAINLESS STEEL  
HANDLES-CHROME PLATED
7. PLEASE REFER TO INSTALLATION INSTRUCTIONS FOR MOUNTING OF HANDLES, AND DOOR ASSEMBLY MOUNTING.

### SPECIFICATIONS

<p><u>FLANGED FRAME</u> .080-6063-T5 EXTRUDED ALUMINUM</p> <p><u>DOOR PANEL FRAME</u> .080-6063-T5 EXTRUDED ALUMINUM</p>	<p><u>DOOR PANELS</u> 20 GA. GALVANIZED STEEL</p> <p><u>INSULATION</u> 2.25 LB. DENSITY POLYURETHANE FOAM</p> <p><u>HANDLES</u> *310 DUAL ACTING DIE CAST ZINC</p> <p><u>GASKET</u> CONTINUOUS LENGTH EXTRUDED FOAMED SANTOPRENE</p>	<p><u>HINGE</u> STAINLESS STEEL CONTINUOUS TYPE</p> <p><u>FINISH</u> MILL</p>
--	--	---

PROJECT/LOCATION
ARCHITECT/ENGINEER
CONTRACTOR
SALES ENGINEER
<b>ARROW UNITED INDUSTRIES</b> A DIVISION OF MESTEK, INC. 314 RIVERSIDE DRIVE WYALUSING, PA 18853 TEL: (570) 746-1888 FAX: (570) 746-9286

ACCESS DOOR-MODEL AHFL-40

DRAWN BY JRL  
DATE 7-25-06

DRAWING NO.  
38534-C