
# **MODEL SPH-22-F-6**

**Penthouse Louver •** Post Corner • 6" Blade Width • Stationary Straight Blades • Extruded Aluminum

Page 1

#### Interior Fastening Installation

**ANGLES** - All corners and intermediate to extend from roof into curb.

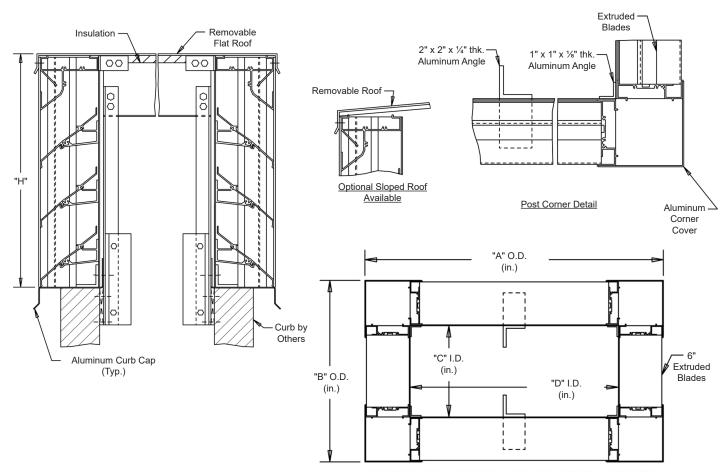

Continuous angle at the four corners and intermediate as required.

#### Standard Materials and Construction

MATERIAL: .081" thick (nominal) or .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy, with reinforcing rib bosses.

ROOF: .060" thick (nominal) sheet aluminum removable roof, reinforced with aluminum bracing where required to take a snow

load of 40 lbs./sq.ft., plus a required safety factor.

SCREENS: (When indicated)

Bird Screen - 1/2" square mesh, 19 GA. galvanized steel, on interior.

**INSULATION:** Underside of roof is lined with ½" thick insulation.

NOTES: Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.


Item #	Qty	Α	В	С	D	Н	Mullion	Туре	Location		00
		Penthouse Dimensions					IVIUIIION	Screens			<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	

## **MODEL SPH-22-F-6**

Penthouse Louver • Post Corner • 6" Blade Width • Stationary Straight Blades • Extruded Aluminum

Page 2

### **Exterior Fastening Installation**

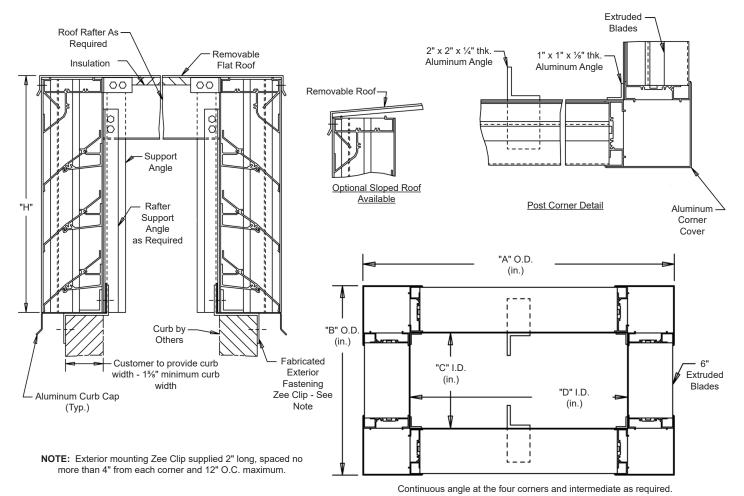

### Standard Materials and Construction

MATERIAL: .081" thick (nominal) or .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy, with reinforcing rib bosses.

ROOF: .060" thick (nominal) sheet aluminum removable roof, reinforced with aluminum bracing where required to take a snow

load of 40 lbs./sq.ft., plus a required safety factor.

SCREENS: (When indicated)

Bird Screen - 1/2" square mesh, 19 GA. galvanized steel, on interior.

**INSULATION:** Underside of roof is lined with ½" thick insulation.

NOTES: Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.

Item #	Qty	Α	В	С	D	Н	Mullion	Туре	Location		00
		Penthouse Dimensions					IVIUIIION	Screens			<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	

