


ARROW (IN-SWING ONLY) TYPE STANDARD ACCESS DOOR W/LOUVERS AHFL-40

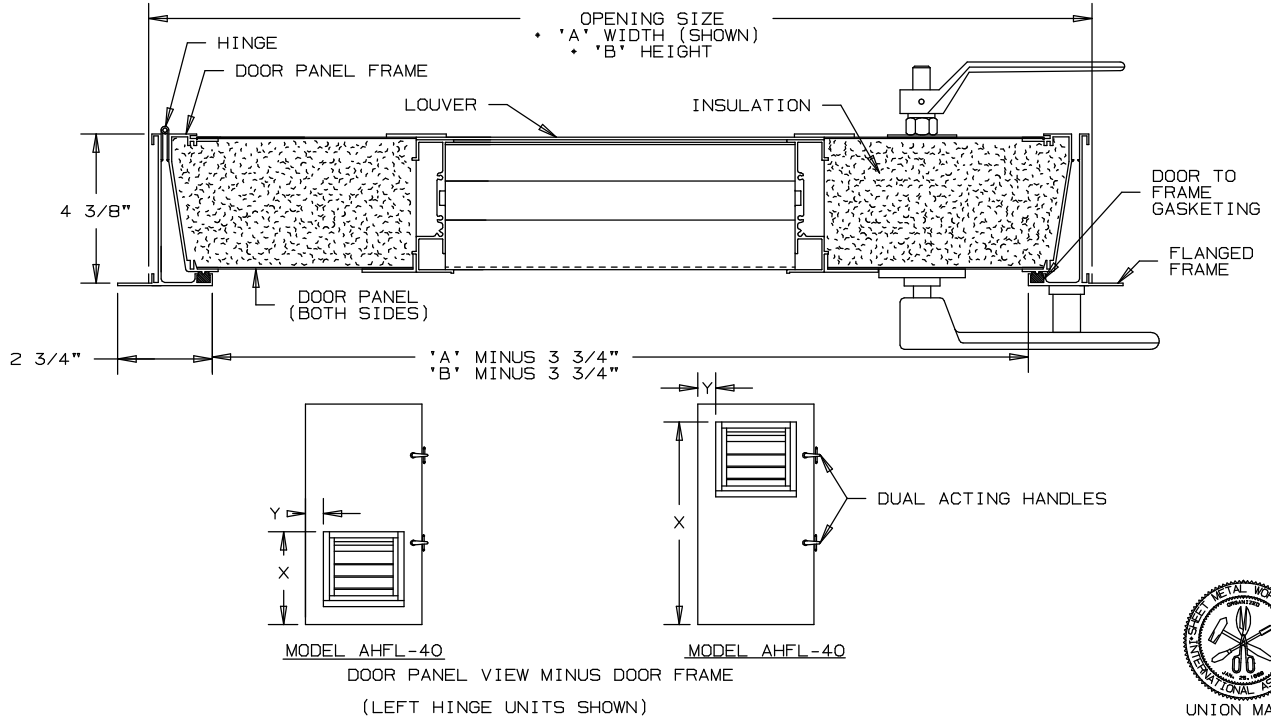

SCHEDULE

ITEM	QTY	MODEL			OPENING SIZE		LOUVER SIZE (W x H)	D.O.D. OF FLANGE	LOUVER LOCATION ("X" AND "Y") O.D. DIMENSIONS
		AHFL-40	L/H	R/H	*'A' WIDTH	*'B' HEIGHT	EA-400-F LOUVER		
		AHFL-40							
		AHFL-40							


NOTES

1. HINGE ALWAYS FURNISHED ON 'B' HEIGHT DIMENSION.
2. (L) DESIGNATES DOORS WITH LOUVERS, SPECIFY (L/H) LEFT HAND OR (R/H) RIGHT HAND HINGE WHEN VIEWING FROM THE OUTSIDE.
3. MINIMUM LOUVER SIZE IS 12"x12". MAXIMUM LOUVER SIZE IS FULL DOOR PANEL SIZE. LOUVER LOCATION USE X-Y DIMENSIONS.
4. UNLESS OTHERWISE SPECIFIED, DOOR WILL BE FABRICATED 1/4" UNDER LISTED SIZE. DIMENSIONAL TOLERANCE IS ±.075.
5. MINIMUM SIZE 12" WIDE x 12" HIGH MAXIMUM SIZE 48" WIDE x 96" HIGH (WIDTH CANNOT EXCEED 2x HEIGHT)
6. OPTIONAL MATERIALS AVAILABLE FOR THE FOLLOWING COMPONENTS:
DOOR PANELS-BONDERIZED STEEL, ALUMINUM OR STAINLESS STEEL
HANDLES-CHROME PLATED
7. PLEASE REFER TO INSTALLATION INSTRUCTIONS FOR MOUNTING OF HANDLES, AND DOOR ASSEMBLY MOUNTING.

SPECIFICATIONS

<p>FLANGED FRAME .080-6063-T5 EXTRUDED ALUMINUM</p> <p>DOOR PANEL FRAME .080-6063-T5 EXTRUDED ALUMINUM</p> <p>I-BEAM SUPPORT .060-6063-T5 EXTRUDED ALUMINUM</p>	<p>DOOR PANELS 20 GA. GALVANIZED STEEL</p> <p>INSULATION 2.25 LB. DENSITY POLYURETHANE FOAM</p> <p>HANDLES #310 DUAL ACTING DIE CAST ZINC</p> <p>GASKET CONTINUOUS LENGTH EXTRUDED FOAMED SANTOPRENE</p>	<p>HINGE STAINLESS STEEL CONTINUOUS TYPE</p> <p>FINISH MILL</p>	<p>PROJECT/LOCATION</p> <p>ARCHITECT/ENGINEER</p> <p>CONTRACTOR</p> <p>SALES ENGINEER</p>
<p>ACCESS DOOR-MODEL AHFL-40</p>			<p>ARROW UNITED INDUSTRIES A DIVISION OF MESTEK, INC. 314 RIVERSIDE DRIVE WYALUSING, PA 18853 TEL: (570) 746-1888 FAX: (570) 746-9286</p>
		<p>DRAWN BY JRL</p> <p>DATE 7-25-06</p>	<p>DRAWING NO. 38534-D</p>

ARROW (OUT-SWING ONLY) TYPE STANDARD ACCESS DOOR W/LOUVERS AHFL-40

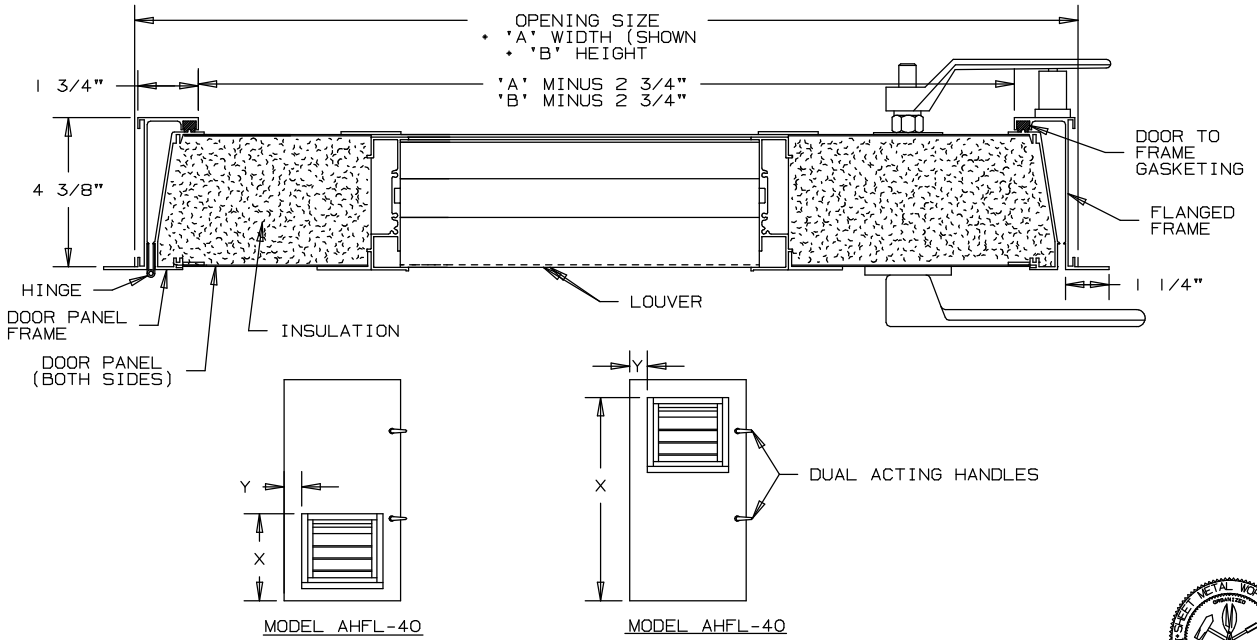

DOOR PANEL VIEW MINUS FRAME
(LEFT HINGE UNITS SHOWN)

SCHEDULE

ITEM	QTY	MODEL		OPENING SIZE		LOUVER SIZE (W x H) O.D. OF FLANGE	LOUVER LOCATION ("X" AND "Y") O.D. DIMENSIONS
		AHFL-40	L/H R/H	'A' WIDTH	'B' HEIGHT		
		AHFL-40				EA-400-F LOUVER	
		AHFL-40					
		AHFL-40					

NOTES

1. HINGE ALWAYS FURNISHED ON 'B' HEIGHT DIMENSION.
2. (L) DESIGNATES DOORS WITH LOUVERS. SPECIFY (L/H) LEFT HAND OR (R/H) RIGHT HAND HINGE WHEN VIEWING FROM THE OUTSIDE.
3. MINIMUM LOUVER SIZE IS 12"x12". MAXIMUM LOUVER SIZE IS FULL DOOR PANEL SIZE. LOUVER LOCATION USE X-Y DIMENSIONS.
- *4. UNLESS OTHERWISE SPECIFIED, DOOR WILL BE FABRICATED 1/4" UNDER LISTED SIZE. DIMENSIONAL TOLERANCE IS ±.075.
5. MINIMUM SIZE 12" WIDE x 12" HIGH
MAXIMUM SIZE 48" WIDE x 96" HIGH
(WIDTH CANNOT EXCEED 2x HEIGHT)
6. OPTIONAL MATERIALS AVAILABLE FOR THE FOLLOWING COMPONENTS:
DOOR PANELS-BONDERIZED STEEL, ALUMINUM OR STAINLESS STEEL
HANDLES-CHROME PLATED
7. PLEASE REFER TO INSTALLATION INSTRUCTIONS FOR MOUNTING OF HANDLES, AND DOOR ASSEMBLY MOUNTING.

SPECIFICATIONS

<p>FLANGED FRAME .080-6063-T5 EXTRUDED ALUMINUM</p> <p>DOOR PANEL FRAME .080-6063-T5 EXTRUDED ALUMINUM</p>	<p>DOOR PANELS 20 GA. GALVANIZED STEEL</p> <p>INSULATION 2.25 LB. DENSITY POLYURETHANE FOAM</p> <p>HANDLES *310 DUAL ACTING DIE CAST ZINC</p> <p>GASKET CONTINUOUS LENGTH EXTRUDED FOAMED SANTOPRENE</p>	<p>HINGE STAINLESS STEEL CONTINUOUS TYPE</p> <p>FINISH MILL</p>
--	--	---

PROJECT/LOCATION
ARCHITECT/ENGINEER
CONTRACTOR
SALES ENGINEER
ARROW UNITED INDUSTRIES A DIVISION OF MESTEK, INC. 314 RIVERSIDE DRIVE WYALUSING, PA 18853 TEL: (570) 746-1888 FAX: (570) 746-9286

ACCESS DOOR-MODEL AHFL-40

DRAWN BY JRL
DATE 7-25-06

DRAWING NO.
38534-C