ARROW
THIN LINE LOUVER
EXTRUDED ALUMINUM

TYPE EA-TL-30

0.465" DEEP, FIXED, J/K 30° TYPE BLADE

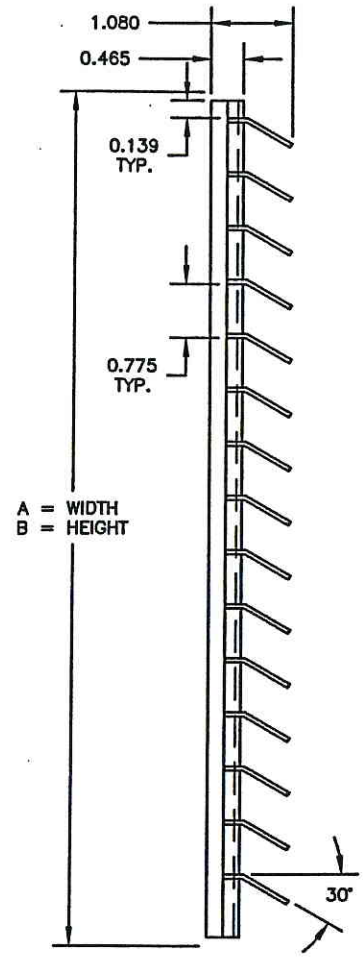

SECTION VIEW

SPECIFICATIONS

FRAME: FRAME OPTIONAL, SEE BACKSIDE OF PAGE.

VBS: 0.465" DEEP HAT CHANNEL, 0.063" THICK 6063-T5 ALUMINUM ALLOY VERTICAL BLADE SUPPORT (VBS).

BLADES: 0.063" THICK 6063-T5 ALUMINUM ALLOY.

FINISH: MILL.

MAX. PANEL SIZE: 96" x 48"

MIN. PANEL SIZE: 12" x 12"

CONTACT FACTORY FOR LOUVER SIZES LARGER THAN 96" x 48".

DIMENSIONS: "A" (WIDTH) AND "B" (HEIGHT) ARE OPENING SIZES. LOUVERS ARE MADE 1/4" UNDERSIZED FOR STANDARD AND OPTIONAL FRAME CONSTRUCTION.

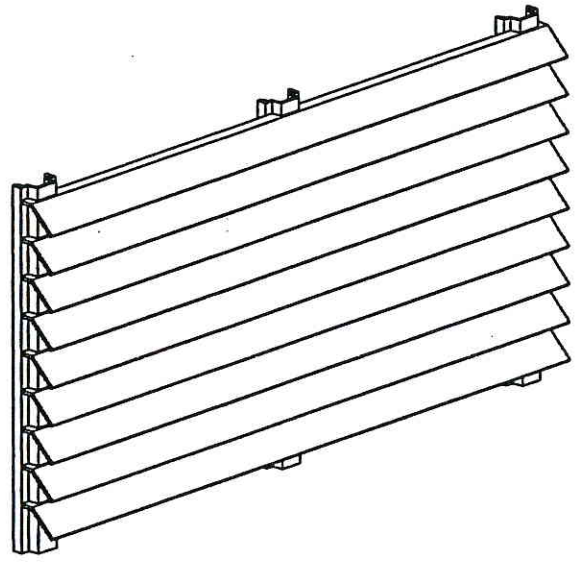

FINISH OPTIONS:

- ☐ MILL
- ☐ ANODIZED
- ☐ PAINTED

ITEM	QTY.	WIDTH	HEIGHT	PAR.	OPP.	ACTUATOR MODEL	INT.	EXT.	N.C.	N.O.	TAGGING
		DAMPER SIZE (O.D.)					LOCATION		FUNCTION		

UNION MADE

ARROW UNITED INDUSTRIES
A DIVISION OF MESTEK, INC.
314 RIVERSIDE DRIVE
WYALUSING, PA 18853
TEL:(570)746-1888 FAX:(570)746-9286
WEB ADDRESS: WWW.ARROWUNITED.COM

AGENT: _____

ARCH./ENG.:

CONTR.:

PROJECT:

EDR: ECN: JOB:

DATE: DWN.: DWG.: