ARROW

EXTRUDED ALUMINUM GRILLE SCREEN
ANGULAR CONTINUOUS LINE

TYPE AG-2CL

MODULAR GRILLE SCREEN - STATIONARY

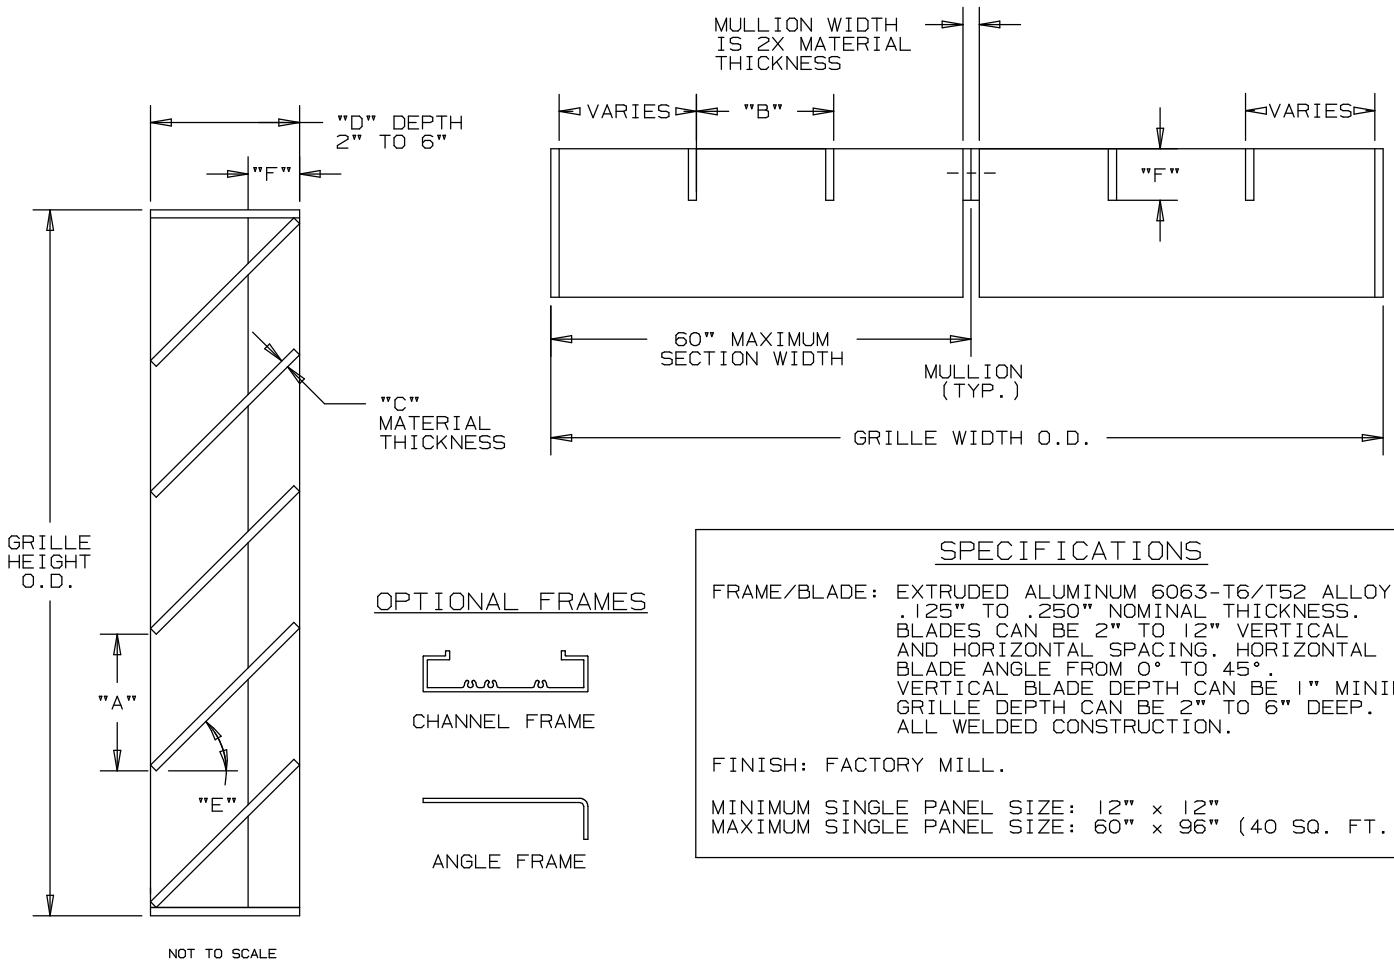

OPTIONAL FRAMES

CHANNEL FRAME

ANGLE FRAME

SPECIFICATIONS

FRAME/BLADE: EXTRUDED ALUMINUM 6063-T6/T52 ALLOY, .125" TO .250" NOMINAL THICKNESS. BLADES CAN BE 2" TO 12" VERTICAL AND HORIZONTAL SPACING. HORIZONTAL BLADE ANGLE FROM 0° TO 45°. VERTICAL BLADE DEPTH CAN BE 1" MINIMUM. GRILLE DEPTH CAN BE 2" TO 6" DEEP. ALL WELDED CONSTRUCTION.

FINISH: FACTORY MILL.

MINIMUM SINGLE PANEL SIZE: 12" x 12"
MAXIMUM SINGLE PANEL SIZE: 60" x 96" (40 SQ. FT.)

"A" = 2" TO 12" (HORIZONTAL BLADE SPACING)
"B" = 2" TO 12" (VERTICAL BLADE SPACING)
"C" = .125" TO .250" (MATERIAL THICKNESS)
"D" = 2" TO 6" (GRILLE DEPTH)
"E" = 0° TO 45° (BLADE ANGLE)
"F" = 1" MINIMUM (VERTICAL BLADE DEPTH)

UNION MADE

NOMINAL DEDUCTIONS WILL BE MADE TO OPENING SIZES GIVEN.

ITEM	QTY.	OPENING SIZE WIDTH	OPENING SIZE HEIGHT	GRILLE SIZE (O.D.) WIDTH	GRILLE SIZE (O.D.) HEIGHT	MULL.	"A"	"B"	"C"	"D"	"E"	"F"

ARROW UNITED INDUSTRIES
A DIVISION OF MESTEK, INC.
314 RIVERSIDE DRIVE
WYALUSING, PA 18853
TEL: (570)746-1888 FAX: (570)746-9286
WEB ADDRESS: WWW.ARROWUNITED.COM

AGENT: _____

ARCH./ENG.:

CONTR.:

PROJECT:

EDR: ECN: JOB:

DATE: DWN.: DWG.: